



Trimicon filter element N1TM, N3TM

Description

The filter elements of the Trimicon series have been specially developed for the combined filtration of:

- Finest solid particle contamination
- Water
- Oil ageing products

from hydraulic and lubrication oils in the bypass flow.

They are a combination of pleated and spun spray depth filter elements. The filter layers used are produced using melt-blown technology (synthetic fibres).

Applications

- Offline filtration in lubrication systems (e.g. in wind turbines)
- Offline filtration in hydraulic systems
- Transmission and hydraulic test rigs

Special features

- Excellent filtration performance ($\beta_{5(c)} > 1000$)
- Low initial differential pressure
- High contamination retention capacity
- Fine particle contamination, water and oil ageing products removed by depth filter material
- Broad range of fluid compatibility
- Simple element change

Technical specifications

General specifications		
	N1	N3
Contamination retention capacity ISOMTD at $\Delta P = 2.5$ bar	≈ 410 g	≈ 2500 g
Water retention capacity	≈ 680 ml	≈ 2.2 l
Beta value $\beta_{5(c)}$ @ 2 bar	$> 1,000$	$> 1,000$
Filtration rating	3 μm	
Differential pressure at starting point	< 0.1 bar	
Permitted fluid temperature range	-10 – 80 °C	
Storage temperature range	5 – 40 °C	

Order details

N - 1 - TM - 003 / - F

Nominal flow rate

- 1 = nominal flow rate 1 l/min
- 3 = nominal flow rate 3 l/min

Element type

TM = Trimicron

Filtration rating

003 = 3 µm

Seal material

- N = NBR
- F = FKM (FPM, Viton®)


Note

The information in this brochure relates to the operating conditions and applications described.


For applications and operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

N1TM element differential pressure

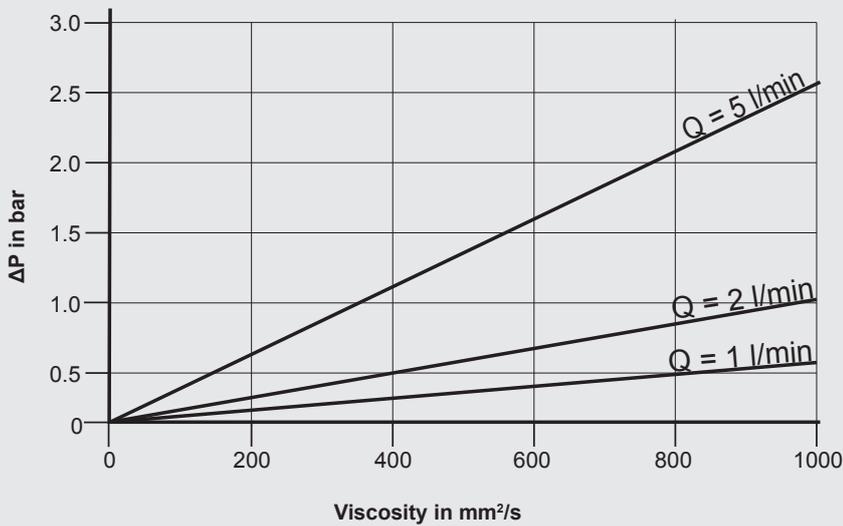

N3TM element differential pressure

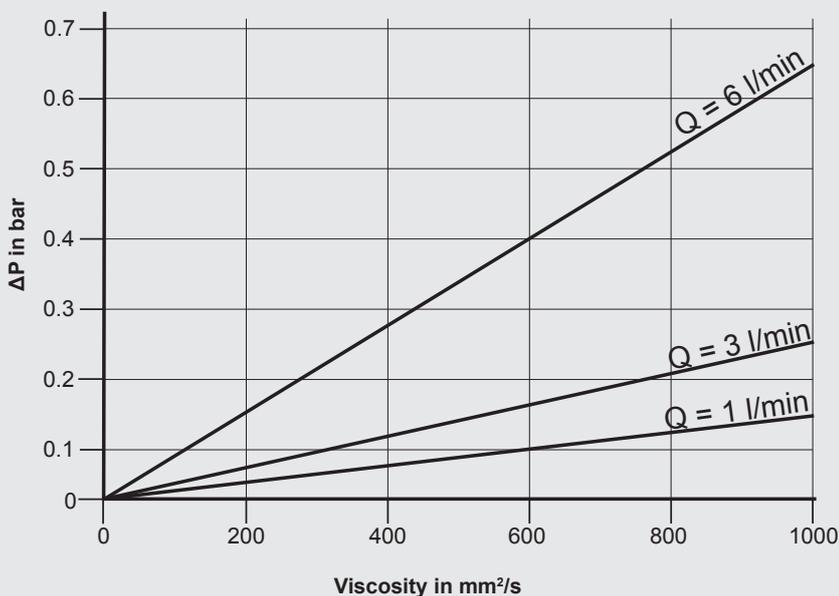

HYDAC FILTER SYSTEMS GMBH
 Industriegebiet
D-66280 Sulzbach / Saar
 Tel.: +49 (0) 6897/509-01
 Fax: +49 (0) 6897/509-9046
 Internet: www.hydac.com
 E-mail: filtersystems@hydac.com